

JET PROPULSION LABORATORY
NOTIFICATION OF CLEARANCE

09/18/03

TO: J. Plaut
FROM: Logistics and Technical Information Division
SUBJECT: Notification of Clearance - CL#03-2553


The following title has been cleared by the Document Review Services, Section 274, for public release, presentation, and/or printing in the open literature:

Probing the Subsurface of the Martian Polar Regions with
MARSIS on Mars Express

This clearance is issued for an abstract and is valid for U.S. and foreign release.

Clearance is for the abstract only. Any expansion of this abstract must be cleared prior to presentation or publication.

Clearance issued by

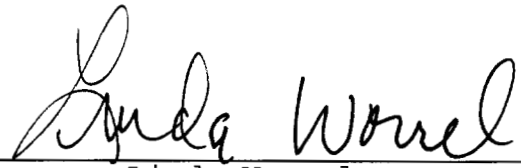

Linda Worrel
Document Review Services
Section 274

(Over)

AUTHORIZATION FOR THE EXTERNAL RELEASE OF INFORMATION

Submit web-site URL or two copies of document with this form to Document Review, 111-120,
or email them to docrev@jpl.nasa.gov.

CL No. 63-2553
(for DRS use only)

LEAD JPL AUTHOR Jeffrey J. Plaut		MAIL STOP 183-510	EXTENSION 3-3799
Approval is required for all JPL scientific and technical information intended for unrestricted external release via print or electronic media. See explanations on page 3 of this form and the Distribute Knowledge documents available through http://dmie .			<input checked="" type="checkbox"/> Original <input type="checkbox"/> Modified
I. DOCUMENT AND PROJECT IDENTIFICATION - To be completed by Author/Originator			
<input checked="" type="checkbox"/> ABSTRACT (for publication) <input type="checkbox"/> FULL PAPER (including poster, video, CD-ROM)		<input type="checkbox"/> WEB SITE <input type="checkbox"/> OTHER	<input type="checkbox"/> ORAL PRESENTATION <input type="checkbox"/> Abstract <input type="checkbox"/> Full Text
TITLE PROBING THE SUBSURFACE OF THE MARTIAN POLAR REGIONS WITH MARSIS ON MARS EXPRESS.		OTHER AUTHORS G. Picardi	<input checked="" type="checkbox"/> Premeeting publication <input type="checkbox"/> Publication on meeting day <input type="checkbox"/> Postmeeting publication <input type="checkbox"/> Poster session <input type="checkbox"/> Handouts
KEY WORDS FOR INDEXING (Separate items with commas)			
THIS WORK: <input type="checkbox"/> Describes technology reported in New Technology Report (NTR) No. _____ <input type="checkbox"/> Provides more information for NTR No(s). _____ <input checked="" type="checkbox"/> Describes only science results, data, or theoretical discussions Publications that describe technology (including software) require an NTR prior to clearance. For assistance, contact the Strategic Intellectual Assets Management Office, ext. 3-3421.		LEAD JPL AUTHOR'S SIGNATURE <u>Jeffrey J. Plaut</u> DATE <u>9/11/2003</u> SECTION OR PROJECT LEVEL MANAGER APPROVAL DATE I attest to the quality of information in this material, including its accuracy, relevance and usefulness, audience suitability, clarity, completeness, and lack of bias. <u>Samuel Gullis</u> <u>15 Sept 03</u>	
ORIGINATING ORGANIZATION NUMBER (Section, Project, or Element) 3223		PERFORMING ORGANIZATION (if different)	
ACCOUNT CODE OR TASK ORDER (For tracking purposes only) 101906 - 3.11		DOCUMENT NUMBER(S), RELEASE DATE(S)	DATE RECEIVED <u>9/17</u> DATE DUE
For presentations, documents, or other scientific/technical information to be externally published (including via electronic media), enter information--such as name, place, and date of conference; periodical or journal name; or book title and publisher--in the area below.			
Web Site: Preclearance URL (JPL internal) _____ Postclearance URL (external) _____			
<input type="checkbox"/> Brochure/Newsletter <input type="checkbox"/> JPL Publication Section 274 Editor (If applicable) _____ <input type="checkbox"/> Journal Name _____ <input checked="" type="checkbox"/> Meeting Title <u>Third International Conference on Mars Polar Science and Exploration</u> Meeting Date <u>Oct. 13-17, 2003</u> Location <u>Alberta, Canada</u> Sponsoring Society _____ <input type="checkbox"/> Book/Book Chapter <input type="checkbox"/> Assigned JPL Task <input type="checkbox"/> Private Venture Publisher _____			
If your document will not be part of a journal, meeting, or book publication (including a web-based publication), can we post the cleared, final version on the JPL worldwide Technical Report Server (TRS) and send it to the NASA Center for Aerospace Information (CASI)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No (For more information on TRS/CASI, see http://techreports.jpl.nasa.gov and http://www.sti.nasa.gov .) If your document will be published, the published version will be posted on the TRS and sent to CASI.			
II. NATIONAL SECURITY CLASSIFICATION			
CHECK ONE (One of the five boxes denoting Security Classification must be checked.) <input type="checkbox"/> SECRET <input type="checkbox"/> SECRET RD <input type="checkbox"/> CONFIDENTIAL <input type="checkbox"/> CONFIDENTIAL RD <input checked="" type="checkbox"/> UNCLASSIFIED			
III. AVAILABILITY CATEGORY - To be completed by Document Review			
NASA EXPORT-CONTROLLED PROGRAM STI <input type="checkbox"/> International Traffic in Arms Regulations (ITAR) <input type="checkbox"/> Export Administration Regulations (EAR)		Export-Controlled Document - U.S. Munitions List (USML Category) _____ or Export Control Classification Number (ECCN) _____ from the Commerce Control List (CCL) _____	
CONFIDENTIAL COMMERCIAL STI (Check appropriate box below and indicate the distribution limitation if applicable.) <input type="checkbox"/> TRADE SECRET <input type="checkbox"/> Limited until (date) _____ <input type="checkbox"/> SBIR <input type="checkbox"/> Limited until (date) _____ <input type="checkbox"/> COPYRIGHTED <input type="checkbox"/> Limited until (date) _____ <input type="checkbox"/> COPYRIGHT <input type="checkbox"/> Publicly available _____ TRANSFERRED TO: (but subject to copying restrictions)		ADDITIONAL INFORMATION (Check appropriate distribution limitation below and/or limited until [date], if applicable.) <input type="checkbox"/> U.S. Government agencies and U.S. Government agency contractors only <input type="checkbox"/> NASA contractors and U.S. Government only <input type="checkbox"/> U.S. Government <input type="checkbox"/> NASA personnel and NASA contractors only agencies only <input type="checkbox"/> Available only with the approval of issuing office <input type="checkbox"/> NASA personnel only	

III. AVAILABILITY CATEGORY (cont.) – To be completed by Document Review			
<input checked="" type="checkbox"/> PUBLICLY AVAILABLE STI	Publicly available means it is unlimited and unclassified, is not export-controlled, does not contain confidential commercial data, and has cleared any applicable patent application.		
IV. DOCUMENT DISCLOSING AN INVENTION (For SIAMO Use Only) ROUTED ON			
<input type="checkbox"/> If STI discloses an invention Check box and send to SIAMO	COMMENTS		
THIS DOCUMENT MAY BE RELEASED ON (date)	STRATEGIC INTELLECTUAL ASSETS MANAGEMENT OFFICE (SIAMO) SIGNATURE <div style="text-align: center; font-size: 2em; margin-top: 10px;">N/A</div>		DATE
V. BLANKET AVAILABILITY AUTHORIZATION (Optional)			
<input type="checkbox"/> All documents issued under the following contract/grant/project number may be processed as checked in Sections II and III. This blanket availability authorization is granted on (date) _____ Check one: <input type="checkbox"/> Contract <input type="checkbox"/> Grant <input type="checkbox"/> Project Number _____			
The blanket release authorization granted on (date) _____ <input type="checkbox"/> is RESCINDED – Future documents must have individual availability authorizations. <input type="checkbox"/> is MODIFIED – Limitations for all documents processed in the STI system under the blanket release should be changed to conform to blocks as checked in Sections II and III.			
SIGNATURE		MAIL STOP	DATE
VI. PROJECT OFFICER/TECHNICAL MONITOR/DIVISION CHIEF REVIEW OF I THROUGH V			
NAME OF PROJECT OFFICER OR TECH. MONITOR _____ <input type="checkbox"/> MAIL STOP <input type="checkbox"/> SIGNATURE _____ <input type="checkbox"/> DATE _____			
VII. EXPORT CONTROL REVIEW/CONFIRMATION ROUTED ON			
<input type="checkbox"/> Public release is approved <input type="checkbox"/> Public release not approved due to export control <input type="checkbox"/> Export-controlled limitation is not applicable <input type="checkbox"/> Export-controlled limitation is approved <input type="checkbox"/> Export-controlled limitation (ITAR/EAR marked in Section III is assigned to this document)			
USML CATEGORY NUMBER (ITAR)	CCL NUMBER, ECCN NUMBER (EAR)	JPL EXPORT CONTROL ADMIN. REPRESENTATIVE SIGNATURE	DATE
COMMENTS			
VIII. OTHER APPROVALS ROUTED ON			
<input type="checkbox"/> LAUNCH APPROVAL <input type="checkbox"/> OFFICE OF COMMUNICATIONS AND EDUCATION <input type="checkbox"/> GENERAL COUNSEL <input type="checkbox"/> Budgetary/Cost Data <input type="checkbox"/> Vendor Data <input type="checkbox"/> Copyrights <input type="checkbox"/> Other _____ <input type="checkbox"/> OTHER _____		COMMENTS SIGNATURE _____ DATE _____	
IX. FINAL VERIFICATION, APPROVAL, AND DISPOSITION BY DOCUMENT REVIEW			
I have determined that this publication: <input type="checkbox"/> DOES contain ITAR/export-controlled, confidential commercial information, and/or discloses an invention and the appropriate limitation is checked in Sections III and/or IV.			
		<input checked="" type="checkbox"/> Does NOT contain ITAR/export-controlled, confidential commercial information, nor does it disclose an invention and may be released as indicated above.	
USML CATEGORY NUMBER (ITAR)	CCL NUMBER, ECCN NUMBER (EAR)		
<input checked="" type="checkbox"/> Public release is approved for U.S. and foreign distribution	<input type="checkbox"/> Public release is not approved		
COMMENTS			
SIGNATURE <div style="font-size: 1.5em; margin-top: 10px;">Amela Worcel</div>		MAIL STOP <div style="font-size: 1.5em; margin-top: 10px;">11-213</div>	DATE <div style="font-size: 1.5em; margin-top: 10px;">9/17/03</div>
<input type="checkbox"/> Obtained published version Date _____		<input type="checkbox"/> Obtained final JPL version Date _____	

PROBING THE SUBSURFACE OF THE MARTIAN POLAR REGIONS WITH MARSIS ON MARS EXPRESS. J. J. Plaut¹, G. Picardi², and the MARSIS Team. ¹Jet Propulsion Laboratory, California Institute of Technology, Mail Stop 183-501, 4800 Oak Grove Dr., Pasadena, CA 91109, plaut@jpl.nasa.gov, ²INFO-COM Department, University of Rome "La Sapienza", Via Eudossiana, 18, 00185 Rome, Italy.

Introduction: The European Space Agency (ESA) is currently conducting a mission to Mars known as Mars Express. The orbiter carries an instrument called the Mars Advanced Radar for Subsurface and Ionospheric Sounding (MARSIS). The MARSIS experiment is a joint project between NASA and the Italian Space Agency, and is being carried out by the University of Rome, the Jet Propulsion Laboratory, Alenia Aerospazio, and the University of Iowa. This paper describes the science objectives of the experiment, the instrument characteristics, and applications of the MARSIS investigation to studies of the martian polar regions.

Science Objectives: The primary objective of the MARSIS experiment is to detect, map and characterize subsurface material discontinuities in the upper portions of the crust of Mars. These may include boundaries of liquid water-bearing zones, icy layers, geologic units and geologic structures. Secondary objectives include characterization of the surface topography, roughness and reflectivity, and passive and active ionospheric sounding. Detection of water and ice reservoirs will address many key issues in the hydrologic, geologic, climatic and possible biologic evolution of Mars, including the current and past global inventory of water, mechanisms of transport and storage of water, the role of liquid water and ice in shaping the landscape of Mars, the stability of liquid water and ice at the surface as an indication of climatic conditions, and the implications of the hydrologic history for the evolution of possible Martian ecosystems.

Instrument Description: MARSIS is a multi-frequency, coherent pulse, synthetic aperture radar sounder/altimeter. The instrument features flexibility in frequency selection for adaptation to the Mars environment, and a secondary, receive-only antenna and data channel to minimize the effects of surface "clutter" on subsurface feature detection. The instrument will acquire echo profiles of the subsurface of Mars at a lateral spacing of approximately 5 km and a vertical (depth) resolution of 50-100 m. Four frequency channels will be available for use: 1.8, 3.0, 4.0 and 5.0 MHz. The lower frequency channels, which are likely to penetrate more deeply, will be used during night-side operations, when the ionospheric plasma frequency is lowest. The primary antenna consists of a simple dipole with a total length of 40 m. An impedance matching system is used to improve antenna efficiency across the range of frequencies. The secondary antenna is designed with a null in its pattern at the spacecraft nadir, and will therefore

primarily detect echoes from off-nadir surface structure (clutter). On-board digital processing will generate coherently summed echo spectra for both the primary and secondary receive streams, at two frequencies. When data bandwidth is limited, or clutter cancellation is not needed, single frequency and/or single antenna data can be acquired. Post-processing on Earth will include convolution of the primary and secondary antenna profiles for surface clutter cancellation, and compilation of map products showing, for example, the depth to detected interfaces.

Detection of Subsurface Interfaces: A number of factors affect the ability of a radar echo sounder such as MARSIS to unambiguously detect a subsurface interface. A boundary must separate two materials of contrasting real dielectric constant, occur over a lateral length scale at least comparable to the sounder footprint (5 km), and over a vertical length scale smaller than the vertical resolution (50 m). The portion of the crust that lies between the surface and the interface must be sufficiently transmissive to allow a round-trip of the radar signal that is still detectable at the receiver on orbit. Scatterers comparable in scale to the radar wavelength (50-150 m) will disperse energy away from the nadir direction; these scatterers may occur at the surface, within the intervening crust, and at the subsurface interface. Larger-scale roughness (100s of m to km) of the terrain can introduce "clutter" that can mask the echo from a subsurface interface. Such topographic undulations (e.g., crater rims, cliff faces, etc.) may contribute echoes from off-nadir positions that correspond in time-delay to the subsurface region being probed. To minimize the effects of off-nadir scattering, a synthetic aperture approach is applied to isolate echoes in the along-track direction (effectively narrowing the footprint), and the secondary, nadir-null antenna is used to identify (and subsequently remove) off-nadir echoes.

A model of surface and subsurface scattering is developed to evaluate the depths and types of interfaces that may be detected. Crustal rocks are represented by two end-members: a low-loss, moderate dielectric andesite, and a lossier, higher dielectric basalt. The porosity is assumed to be filled by one of three materials: martian atmosphere, water ice or liquid water. Near-surface porosity values of 20% and 50% are used, with an exponential decay with depth. The surface roughness is described by a two-scale model, to take into account wavelength-scale scattering and quasi-specular effects.

Model results show that substantial penetration of the signal can be expected for many reasonable cases of surface roughness, crustal composition and volatile content. The primary “noise” factor above which a subsurface reflection must rise is competing signals from off-nadir. Use of the secondary antenna can lower the off-nadir clutter by 10 dB or more. At the lowest frequency (1.8 MHz), an interface between ice-saturated and water-saturated basaltic crust is detected at depths of 4 km, except for the roughest surface models. In the andesite crust, detection is expected at depths > 5 km. At the higher frequencies, detection depths are less (1-2 km in basalt at 5.0 MHz). An interface between dry rock and ice-saturated rock, which might be expected at moderate depths at low latitudes, is more difficult to detect than an ice-water interface, due to smaller dielectric contrasts between the pore-filling material. However, under favorable conditions of roughness and rock composition, such an interface should be detectable in the upper several kilometers of the crust.

If aquifers occur only at great depth (> 5-10 km) in the martian crust, they may elude detection by MARSIS. However, shallower reservoirs of liquid water, perhaps associated with thermal anomalies or an insulating upper stratigraphy, should be detectable. Many other stratigraphic and structural boundaries are expected to be identified by the radar sounding, providing a view into third dimension of the geology of Mars.

Applications in Polar Regions: Data from MARSIS can potentially address several critical issues in Mars polar studies. Of particular interest is the depth and character of the “bed” of the polar layered deposits.

If attenuation of the signal by the layered materials is not too great, it may be possible to map the base of the deposits, and detect basal melting zones, should they exist. Detection of pockets of liquid water beneath the layered deposits would be a dramatic result, with implications for possible ecosystems, and regional or global hydrologic systems. Strong discontinuities in dielectric properties may also be detected within the layered deposits, and may be indicative of major climate shifts. It may be possible to measure the thickness and electrical properties of the residual ice (high albedo unit thought to be water ice in the north and CO₂ ice in the south). Recent observations by the 2001 Mars Odyssey gamma and neutron detectors indicate the presence of ice-rich soil in the upper meter of the surface poleward of about 60° latitude. Analysis of the initial reflected pulse in MARSIS profiles should provide an estimate of the bulk dielectric constant of the upper ~50 m, possibly constraining the thickness of the ice-rich zone. If this zone extends to depths of 100s of m, MARSIS profiles may show its base. The thickness of the low-latitude desiccation zone may also be measurable. Properties of other high latitude terrains will be studied, including the thickness of the north polar erg, and possible subsurface stratigraphic contacts among sedimentary and volcanic units in both polar regions. Detection of shallow (< 5 km) aquifers would revolutionize our ideas on the current state of water on Mars, and provide targets for future biologic searches and a possible sustained human presence.